

Major Components



General Information

Thank you for purchasing an Islander IR series fly reel.

In this manual you will find information on how to take care of you new reel, how to "tune" the sound on the reel to your liking, and how to troubleshoot any problems you are having with the reel.

By following these instructions you will get a lifetime of enjoyment out of this product.

Features of the IR:

- Smooth, no end play between frame and spool.
- Simple clicker drag system.
- Wide range of drag pressure with 3 settings, which is controlled by a frame side adjustment knob.
- One-piece spool and frame construction.
- Quick release spool.
- Easily converts from right to left hand retrieve without tools.

Technical Support

Telephone I-250-544-4856 E-Mail support@islander.com

Taking Care Of Your Reel

Like any precision instrument, this fly fishing reel must be taken care of to ensure a long life. Removing your line from the reel before washing and drying is the best way to keep your reel clean. Backing that is immersed in water will remain wet and will hold moisture against the spool cavity. When rinsing your reel, wash the frame in hot, soapy water, and just wipe down the spool with a cloth.

Specifications

| | IR2 | IR3 | IR4 | IR3LA | IR4LA |
|-------------------|------------|-------------|-------------|---------|---------|
| Line Weight | 4/5 | 5/6 | 7/8 | 4/5 | 5/6 |
| Spool Dia. (in.) | 2.95 | 3.10 | 3.25 | 3.10 | 3.25 |
| Spool Width (in.) | .750 | .780 | .810 | .780 | .810 |
| Spool VoL (in.³) | 3.73 | 4.37 | 5.14 | 3.10 | 3.76 |
| Weight (oz) | 3.6 | 3.8 | 4.2 | 4.1 | 4.8 |
| Capacity + 20lbs | WF4F+100 | WF5F+120 | WF7F+150 | WF4F+60 | WF5F+75 |
| backing (yd.) | or WF5F+75 | or WF6F+100 | or WF8F+125 | | |

Lubricating Your Reel

Your reel comes from the factory lubricated. Periodic lubrication is recommended to maintain optimum performance.

Figure 4

F) Grease spindle

A) Oil clicker

B) Grease
behind clicker

C) Oil post


E) Oil cam

D) Grease cam

- 4. Apply a small amount of oil around each clicker sleeve. Locations (A).
- 5. Apply a small amount of grease at the base of the spindle. Location (F).
- 6. Apply a thin layer of grease around the teeth of the gear. Location (G). Use an old toothbrush to clean the gear.

Note: Before greasing your reel it is a good idea to remove any grit from the external and internal components.


- I. Apply a small amount of grease where the clickers and the spring meet. Locations (B).
- 2. Apply a small amount of grease where the cam and the spring meet. Location (D).
- 3. Apply a small amount of oil around the cam and cam screw. Location (E).



Tuning Your Reel

If desired, the sound and drag of your reel can be tuned with the tip of your finger. The following instructions are for a right hand retrieve configuration. Left hand configuration tuning is mirrored.

- I. To reduce the drag and sound of the reel, tweak the clicker-drag spiring in the (B) direction. This will reduce the pressure of the spring on the back of the clicker, therefore reducing drag and sound.
- 2. To increase the drag and sound of the IR, tweak the clicker-drag spring in the (A) direction. You may need to slide the spring up from behind the clicker. This will increase the force of the spring on the clicker, increasing drag and sound.

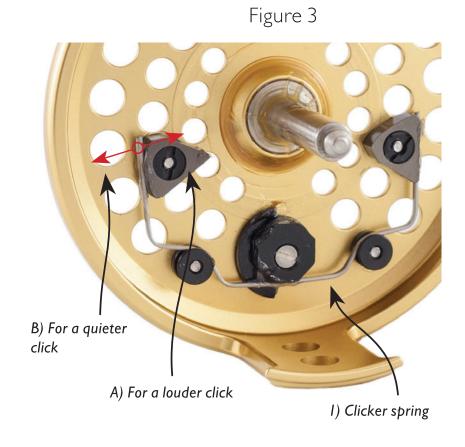

Converting From Right To Left Hand



Figure I – Right-hand retrieve setup

- I. Rotate right hand click [A] so that it points downward.
- 2. Then, rotate left hand clicker [B] so that it points towards the center of the reel (as per Fig. 2).
- 3. Re-engage your spool.

Note: To make the conversion from the right to left hand easier, set the drag to minimum by turning the adjustment knob counterclockwise until it stops.


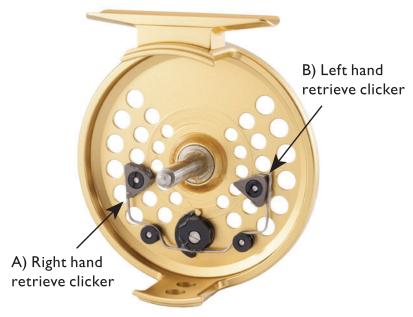


Figure 2 – Left-hand retrieve setup



info@islander.com | www.islander.com



Reel Maintenance Kit

Use the same lubricant as the pros! A well lubricated and clean reel will last you a lifetime. We recommend Islander's Reel Maintenance Kit. It comes with all the lubricants you need for your MR3 reel.

Oil: Super Lube® Multi-Purpose Synthetic-based Oil with PTFE®

Grease: Super Lube® Multi-Purpose Lubricant with Teflon®

Contact your local dealer or visit www.islander.com.

Copyright © 2017 Islander Precision Reels. All Rights Reserved.

Specifications and information contained in this manual are furnished for informational use only, and are subject to change at any time without notice.

Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without the intent to infringe.